

# TrackIt<sup>®</sup>

## Devices

**AINA PTT Voice**


**Responder**

Device and Mount Installation  
Guide

03/22/19



**Command  
Alkon**

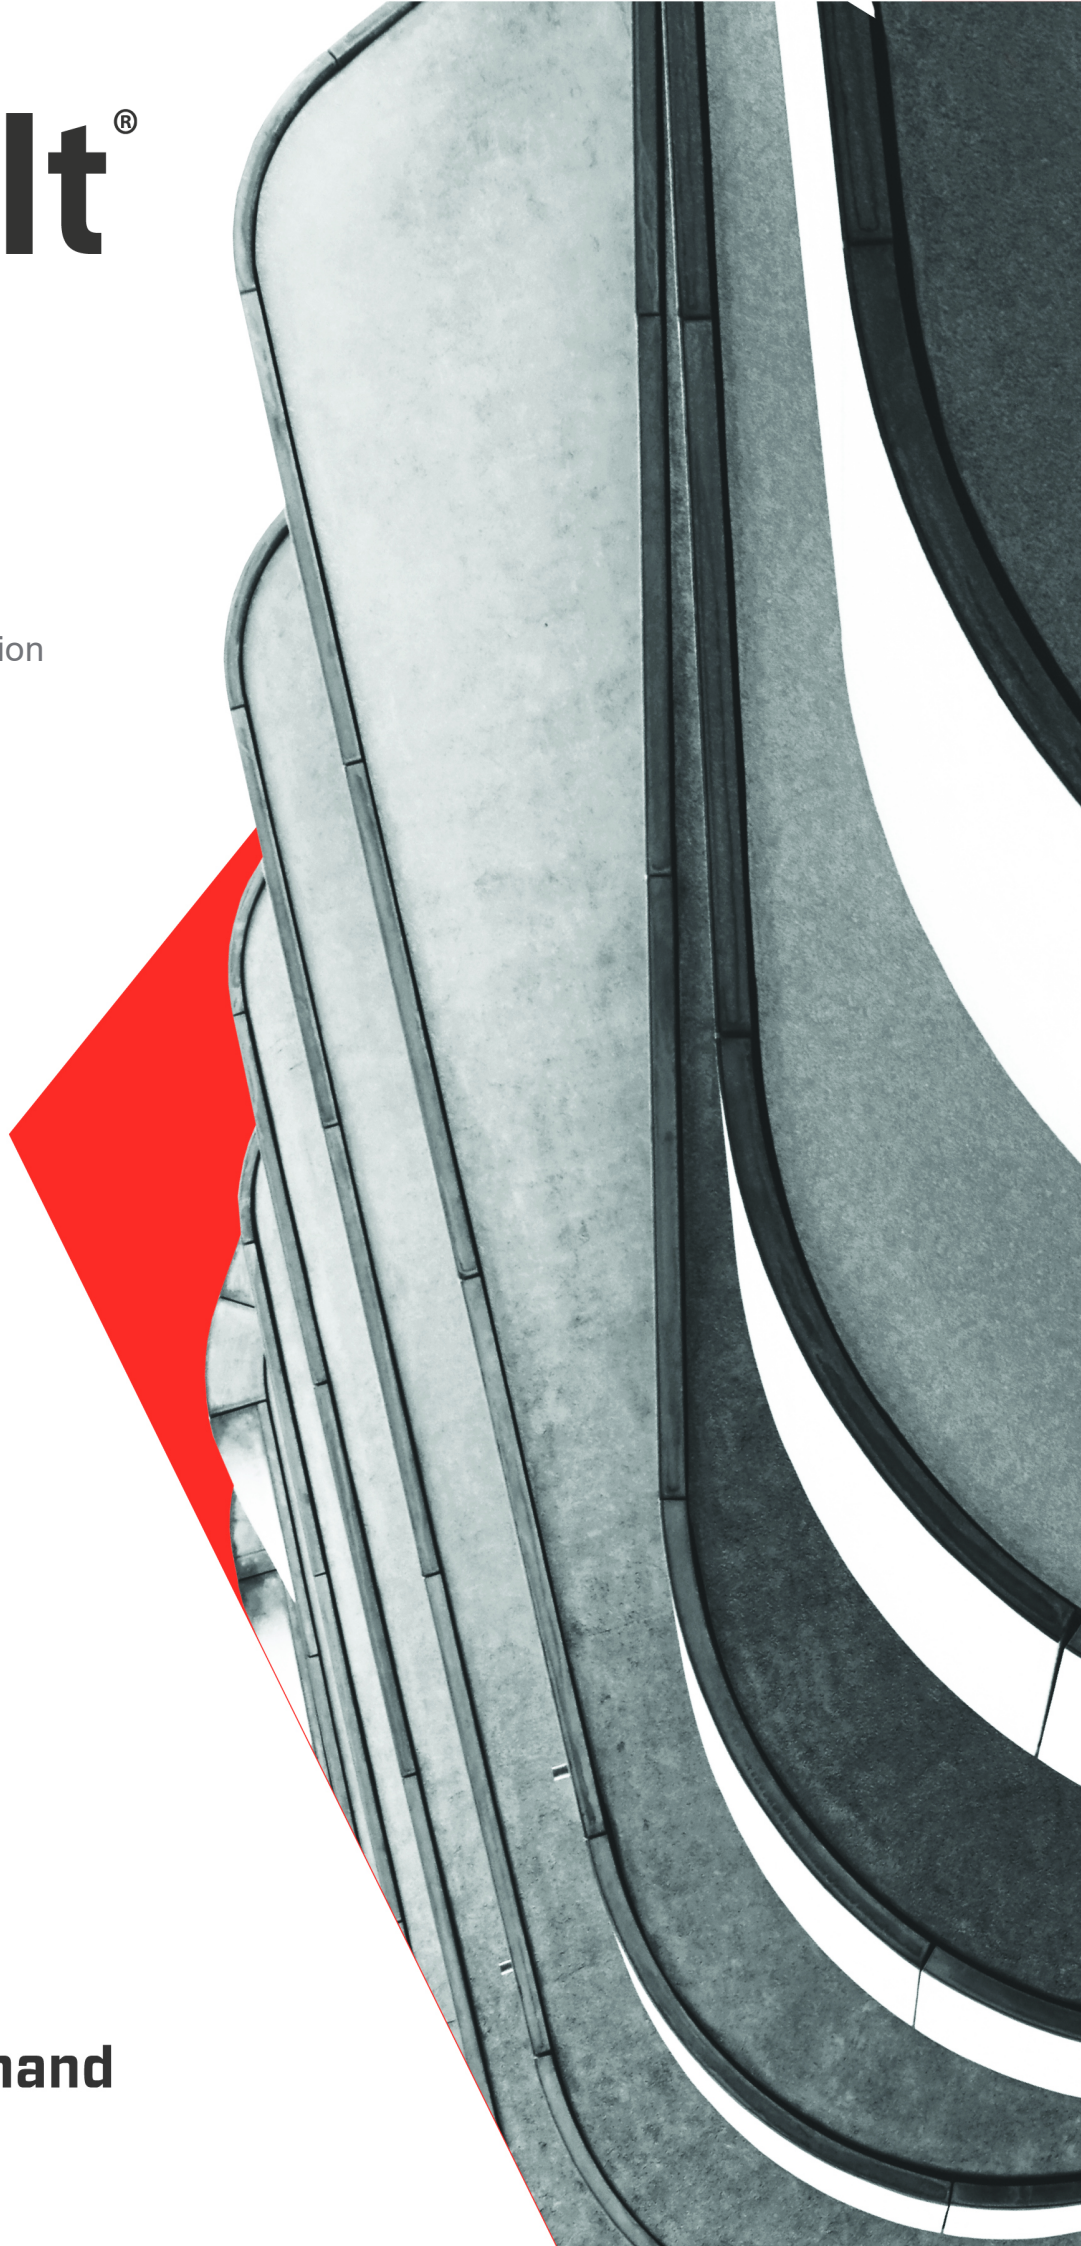

# AINA PTT Voice Responder Installation Guide

The AINA PTT Voice Responder is the Bluetooth radio distributed to Command Alkon Incorporated customers to pair with the Samsung Galaxy Tab Active2. The mount for the radio is compatible with the Gamber-Johnson dock supplied with the Samsung Galaxy Tab Active2. The steps for attaching the radio and mount to the Gamber-Johnson dock are:

1. Check and gather the required components
2. Secure the radio bracket and radio to the tablet dock
3. Attach and pair the radio to the tablet

## Checking & gathering the required components

Ensure the following components are included with the radio unit.



**Component** *AINA PTT Voice Responder*

**Description**

- ▶ Bluetooth speaker-microphone
- ▶ Push-to-talk (PTT) controls
- ▶ Connects to a tablet and PTT apps



**Component** *Docking station connector*

**Description**

- ▶ Cradle and charger for the radio
- ▶ Connects to a tablet via USB



**Component** *Bracket*


**Description**

- ▶ Joins the dock and radio

## Misc. components



*Lanyard*

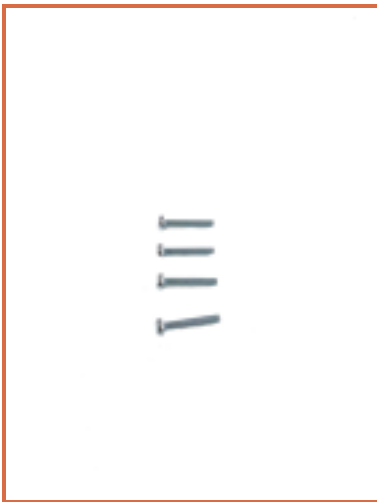

*Screws*

## Required tool

- ▶ Phillips screwdriver or power screwdriver

## Securing the radio bracket and radio to the tablet dock

If you have already installed the Samsung Galaxy Tab Active2 dock and mount in a vehicle, this step will require you to detach the dock from the mount to install the bracket for the radio to the dock. If you have not already attached the dock to the mount, please complete this installation before completing the rest of the steps in the [Samsung Galaxy Tab Active2 installation](#).

*Step 1*




Line up the bracket and dock to allow the screw-in points to be visible. The arm of the bracket should reach over the top of the tablet dock.

*Step 2*



Now that the bracket is lined up, secure the mount to the dock with the bracket in between. Ensure the mount is attached [diagonally](#).

### Step 3



Using the screws included with the installation kit, fasten the radio cradle to the top of the bracket.



### Step 4



Connect the cradle's USB cord to the tablet dock's USB port located on the right side.

### Step 5



With the cradle installed, link the key ring end of the lanyard to the cradle.



### Step 6



Complete the linking of the cradle and radio by hooking the other end of the lanyard to the top of the radio.



*Step 7*



Finally, insert the radio into the cradle by sliding the back of the radio down into the dock.



*Step 8*



With the radio installed, the tablet dock will look like the picture above.

---

### To pair the radio with the tablet

The instructions for pairing the radio's Bluetooth are included with the radio's instructions and on the back of the radio itself, but we have repeated the instructions below.

- ▶ Press the Power and Bluetooth button on the front of the radio for seven seconds until the green LED light starts blinking.
  - ▶ In the tablet, turn on the Bluetooth.
  - ▶ Open the Bluetooth settings in the tablet and connect to the Bluetooth device with the same ID written on the back of the radio.
  - ▶ The tablet and radio are paired when the LED light on the front of the radio blinks blue.
-